

**FUTURE  
SOLUTIONS**

# ENISCOPE®

## IoT Energy Management & Control Platform for Multi-Site Estates

Document detailing the full range of benefits and features  
Eniscope delivers to energy saving projects across the world.



globally recognised



future.solutions



## TABLE OF CONTENTS

<b>System Overview</b>	<b>3</b>
An Energy Management Ecosystem	4
Future-Ready	4
System Overview Diagram	5
<hr/>	
<b>Eniscope Hardware</b>	<b>6</b>
Eniscope Hardware	7
General Specifications	8
Installation	10
Metering	11
Network	11
Data Acquisition	12
Edge Computing	13
<hr/>	
<b>Software</b>	<b>14</b>
Software	15
Analytics	16
Real Time Displays	19
Customisable Public Displays	20
Automated Reporting	21
Tenant Billing	23
Cloud Based Setup - Admin	24
Mobile App	25
Customised Power Bi Dashboards	26
API	26
Data Export	27
IBM Watson Certified	27
<hr/>	
<b>Ancillaries</b>	<b>28</b>
Ancillaries	29
<hr/>	
<b>Other Hardware</b>	<b>30</b>
BACnet Converter	31
Eniscope - Wireless Sensors	32
Appendix - Cost Comparison	35



# SYSTEM OVERVIEW

## SYSTEM OVERVIEW

### Eniscope is so much more than just a meter.

Measurement & Verification (M&V) is at the core of what it does, but the platform has evolved into something far more versatile, effective and capable. It is an end-to-end, real time energy management platform - with hardware, software and IoT capabilities all rolled into one compact, easy to install product.

### An Energy Management Ecosystem

The contents of this document cover the many features and capabilities delivered, or able to be delivered, by the Eniscope system in projects all across the world.

On the **hardware** side, we offer a system that takes up less space than its competitors, that is easier and faster to install than its competitors and which outperforms its competitors in almost all critical categories - from **Communication Protocols** (including MQTT) to real-time **metering parameters**, expandable **on-board storage** to wireless **sensor** and **control** functionality.

We offer a product that is future-proof; configurable and updatable from the cloud, and evolved in real time with the latest advances from our R&D department.

On the software side, our product has been certified by IBM as **'Watson Ready'** and is trusted by their team in an increasing number of projects globally. It is **compatible with almost any BMS system** with no SW development required, and provides all of its **monitoring, analytical and reporting** functionality as standard within its own proprietary cloud-interface - with no reliance on third-party BMS systems. That includes alarms, mobile analytics and scheduling functionality.


And with recent product developments, Eniscope now offers **wireless sensors** and **on/off control** as part of its wider suite of supporting products.

### Future-Ready

It is Future Solutions mission to create an all-encompassing solution suite for energy management projects, with Eniscope at its core. It is that mission which has led us to create **five new products** in a suite of 'Eniscope Air' solutions, each integrating with Eniscope to expand its capabilities deeper into IoT.

Through these products, we will very soon provide global energy saving projects with an advanced new **multiple-sensor solution** (temperature, humidity, occupancy, lux), as well as both **digital and analogue device controls** (on/off) led by automated intelligence within the Eniscope system itself.

## SYSTEM OVERVIEW DIAGRAM

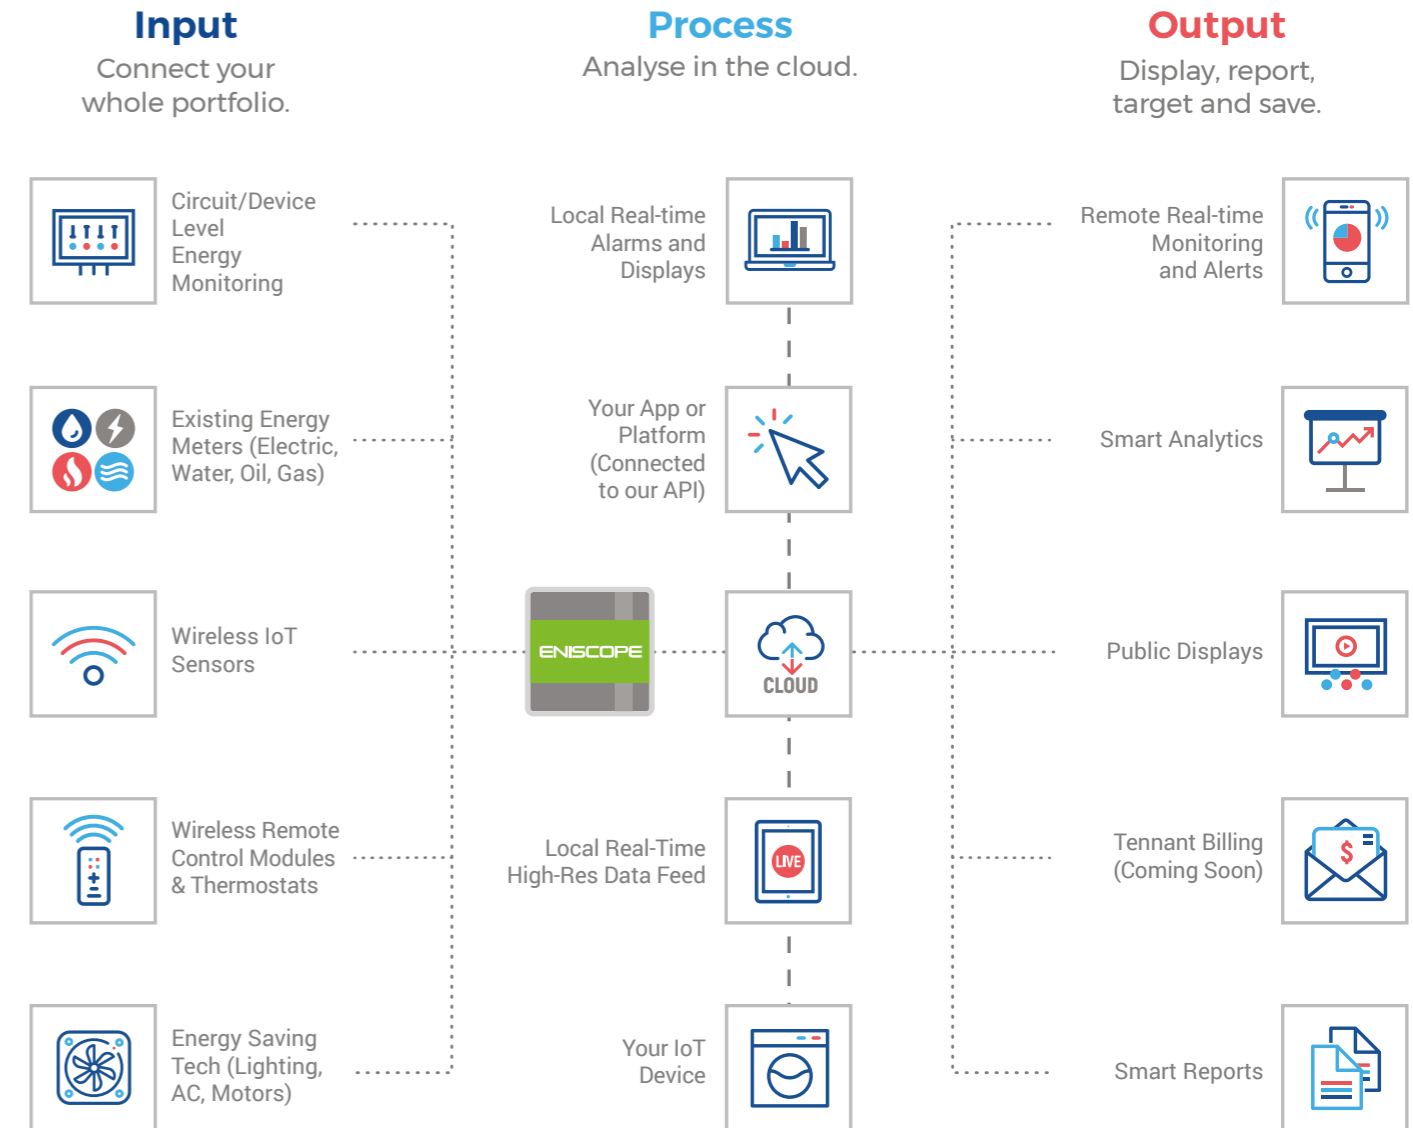

\*Eniscope Hybrid provides the on-board metering, data acquisition, edge computing and internet gateway capabilities that sit at the heart of this ecosystem.



*"With Eniscope, we have brought together in harmony all the features and functionality that add the greatest value to energy saving projects around the world. It's the culmination of over a decade of constant R&D, and the result is a product that is installed in over 30 countries, in thousands of facilities, with huge brands like KFC, 7-Eleven, Telefonica and IBM. It is the heart of the world's largest energy efficiency project - worth over \$500m right now."*

Troy Wrigley, CEO & Founder of BEST, Manufacturer of the Eniscope

**Eniscope proudly boast a perfect 5\* record on software-review platform Capterra.**





# HARDWARE

## ENISCOPE HARDWARE

*“As you know we have been advocates of the BEST hardware for a number of years now and it remains the product we rely on when engaging with new clients in the Energy Performance Contracting market. Having had experience with a wide range of hardware solutions in the past I can say with confidence that Eniscope is the most innovative. The advances already made in designing a small, powerful and very easy to install product puts you at the forefront of the market.”*

- Chris Coath, Head of Energy - NG Bailey

Eniscope has been designed and manufacturer by a company called BEST, based in the UK and operating globally through a network of distributors and partners. BEST is a pioneer in the field of energy management and IoT; launching its first IoT enabled energy meter for the UK market in 2007.

The proprietary metering hardware that we now provide to our clients was born out of the frustration and cost it encountered in bringing together high-density metering, multi-source data acquisition, edge-computing and gateway capabilities from multiple vendors. So, in 2012, BEST committed millions of dollars of investment to creating a new solution that would slash the cost of obtaining accurate, real-time, disaggregated energy data from multi-site estates.

The result was Eniscope Hybrid; Hybrid because it combines the four key elements of energy management hardware into one, super-compact, easy-to-install, easy-to-use, infinitely scalable solution at an unbeatable price-point.

**We know of no other hardware solution on today's world market that offers the standard feature set of an Eniscope Hybrid out of the box, but Eniscope is also a product for tomorrow...**

Thanks to its upgradable operating system, the manufacturer can deploy free, over-the air-upgrades to legacy equipment. For example, in the Summer of 2019, BEST will launch it's Eniscope Air protocol, facilitating a direct, long-range wireless integration between existing Eniscope Hybrids and five new IoT sensor and control solutions (detailed later in this document).

These solutions will unlock millions of dollars of additional savings for energy saving projects across the world and there will be no need to upgrade any of the existing Eniscope hardware to make them work.

For a long-term project, this future-proofing represents a significant advantage with which



## GENERAL SPECIFICATIONS

Adaptable Upload Frequency	Yes	–
Communication Protocols	MQTT, HTTP, FTP, Modbus, One-Wire, 2 x USB, Radio	Flexible integration allowing you to work with incumbent metering infrastructure. Avoids unnecessary replacement costs.
Input Power V	100-240 AC	–
Internal Clock	Yes	Not reliant on an internet connection.
Current Transducers	333mV	Safe to install without switching electrical circuits off (live).
Pulse Inputs	2	–
Metering Phases	24 x single, 8 x 3 Phase	Smaller footprint - doing the job of 8 individual meters in a single box.
USB	2	Internationally recognised connection standard.
Hardware Alerts	Yes	–
Network Configurable	Yes	No direct access required for configuration.
On Board Storage	8 GB SD Card	Up to 90 days of on-board storage, avoiding loss of data in case of network outage.
Expandable Storage	Yes	–
Real Time Measurement HW	Yes troubleshooting and analysis.	Facilitates on-site
1-Wire Temp inputs	8	–
Can include other sensors?	Yes	–

Sensor Types	Temperature, Humidity, Occupance, Light	Facilitates data normalisation, ensuring consistently accurate, reliable and legitimate savings calculations.
Control Equipment	Wireless Switches and Wireless Control	Maximises energy saving potential, including automated intelligence driven decision making.
Remote Firmware Upgrades	Over The Air	Future-proof solution, updateable remotely with the latest feature enhancements.
Additional Functionalities	Eniscope: Periodic firmware updates	–
Time of Use (TOU) Tariffs	Cloud Based	–
Certifications	UL, cUL, CE	Globally compliant technology.
Warranty	2-years standard (extendable on application)	–
Product Robustness	British Engineered	Eniscope offers a very low (less than 0.5%) failure rate.



## INSTALLATION

Smaller, safer and faster to install - Eniscope does the work of eight meters in one easy package.

*"Eniscope was quick to install and provided fast return on investment - around 19 months"*

J L - Reitan Convenience / 7-Eleven Denmark

*"We needed a quick to deploy solution and of course we went to BEST. Our team of two electrical engineers installed 16 Eniscopes, capturing 114 metering points. They did that in just five days. With just one building alone in the first few weeks we've identified £25,000 worth of savings."*

Chris Coath, Head of Energy, NG Bailey

Size (W x L x D) mm	156 x 200 x 60	–
Circuits Density (cm <sup>2</sup> per three-phase)	39 cm <sup>2</sup>	Less than half the footprint of typical competitors (e.g. Schneider PM5510 is 92 cm <sup>2</sup> per three-phase)
8 x Three Phase (24 x Single Phase) Metering Point Footprint cm <sup>2</sup>	312 cm <sup>2</sup>	Class-leading high-density metering footprint, which also includes data acquisition, edge computing and gateway (62% smaller than Schneider PM5510 and EGX300)
Live Installation	Yes	Low voltage split-core CT's allow for non-intrusive, live installation (local regulations permitting)
Plug & Play	Yes	Custom push-fit RJ12 connectors and cable extenders enable rapid cabling of multiple circuits. Cloud data available within 15 minutes of commissioning
Installation Time	1 - 4 hours	Up to X4 quicker to install than competitors (e.g. Schneider PM5510 and EGX300)

## METERING

Electric Parameters:	V, U, I, P, Q, S, PH, E, Ex, RE, REx, AE, Phase Angle 1-2, 1-3	Deeper analysis, allowing insights otherwise invisible across whole estates.
Harmonics:	Yes (not displayed as standard to reduce volume of data transfer)	–
Metering Accuracy:	1%	–
Frequency:	50-60 hz	–
Metering Precision Voltage	1%	–
Metering Precision Energy	1%	–
CT Type	Split Core Current Transducer	No disconnection required to the electrical circuits to carry out an installation.
CT Output	0.333 mV	No danger of electric shock to installers.
Maximum Current	6000A	Allowing monitoring of every possible circuit on whole sites.
Maximum Voltage	346V L-N / 600V L-L	–

## NETWORK

RJ45	Yes	–
Firmware OTA (Over the Air)	Yes	–
Local IP Access	Yes	–
Manufacturer Cloud	Yes	–
Polling Period	1 minute	Allows real time data acquisition.
Bandwidth of Data per Day	1 MB per day per circuit	–

## DATA ACQUISITION

Data may be acquired from multiple sources either directly to the Eniscope Cloud Services or via the data acquisition and collation facilities on the Eniscope Hardware. At all stages, steps are taken to ensure data integrity both within the Eniscope Hardware and the Eniscope Cloud. Other data acquisition systems can easily be integrated into the Eniscope System, permitting a very wide range of data sources to be supported. If the internet connection is lost, Eniscope Hybrid will store high-resolution energy data locally for up to 90 days. Locally stored data is uploaded to the Eniscope Cloud servers as soon as a reliable connection is re-established, ensuring a seamless, uncompromised data view.


<b>Data Source (h/w)</b>	<ul style="list-style-type: none"> <li>4 quadrant, 3 phase metering</li> <li>Modbus/tcp</li> <li>Modbus/rtu</li> <li>Pulse</li> <li>Temperature</li> <li>Mbus</li> <li>BACnet</li> <li>MQTT</li> <li>Eniscope Air IoT Sensors</li> </ul>
<b>IoT Sensors</b>	<ul style="list-style-type: none"> <li>Temperature</li> <li>Humidity</li> <li>Lux</li> <li>PIR</li> <li>Control</li> <li>User configurable inputs and outputs</li> </ul>
<b>Data Sources (cloud)</b>	<ul style="list-style-type: none"> <li>Smart thermostat</li> <li>Eniscope Hardware uploads</li> <li>FTP</li> <li>MQTT</li> <li>Web post</li> </ul>
<b>Data Integrity (h/w)</b>	<ul style="list-style-type: none"> <li>Checksum</li> <li>SDcard backups</li> <li>Retransmission of failed uploads</li> </ul>
<b>Data Integrity (cloud)</b>	<ul style="list-style-type: none"> <li>Multiple redundant servers</li> <li>Network load-balancer</li> <li>Data redundancy</li> <li>Multiple backups</li> </ul>
<b>Data Sources Scalability</b>	Unlimited
<b>Data Storage (cloud)</b>	Indefinite
<b>Data Storage (h/w)</b>	Up to 90 days

## EDGE COMPUTING

A key feature of the Eniscope Hardware is the ability to perform a variety of computational activities on the hardware, close to the source of the data. This can significantly reduce the amount (and hence cost) of data transmission to and from the Eniscope Cloud.

Functions include data consolidation, real-time alarming and alerts, local response control, and even AI and alternative data forwarding services.

<b>Alternate Uploads</b>	<ul style="list-style-type: none"> <li>Open tcp socket</li> <li>MQTT</li> <li>Web post</li> <li>Customizable functions and formats</li> </ul>
<b>Data Aggregation</b>	Mean, min, max, last value
<b>Alerts and Alarms</b>	Real-time level testing and reporting
<b>Local Display</b>	Display data in realtime
<b>Advanced Features</b>	<ul style="list-style-type: none"> <li>AI</li> <li>Local decision making</li> <li>Programmable control</li> </ul>

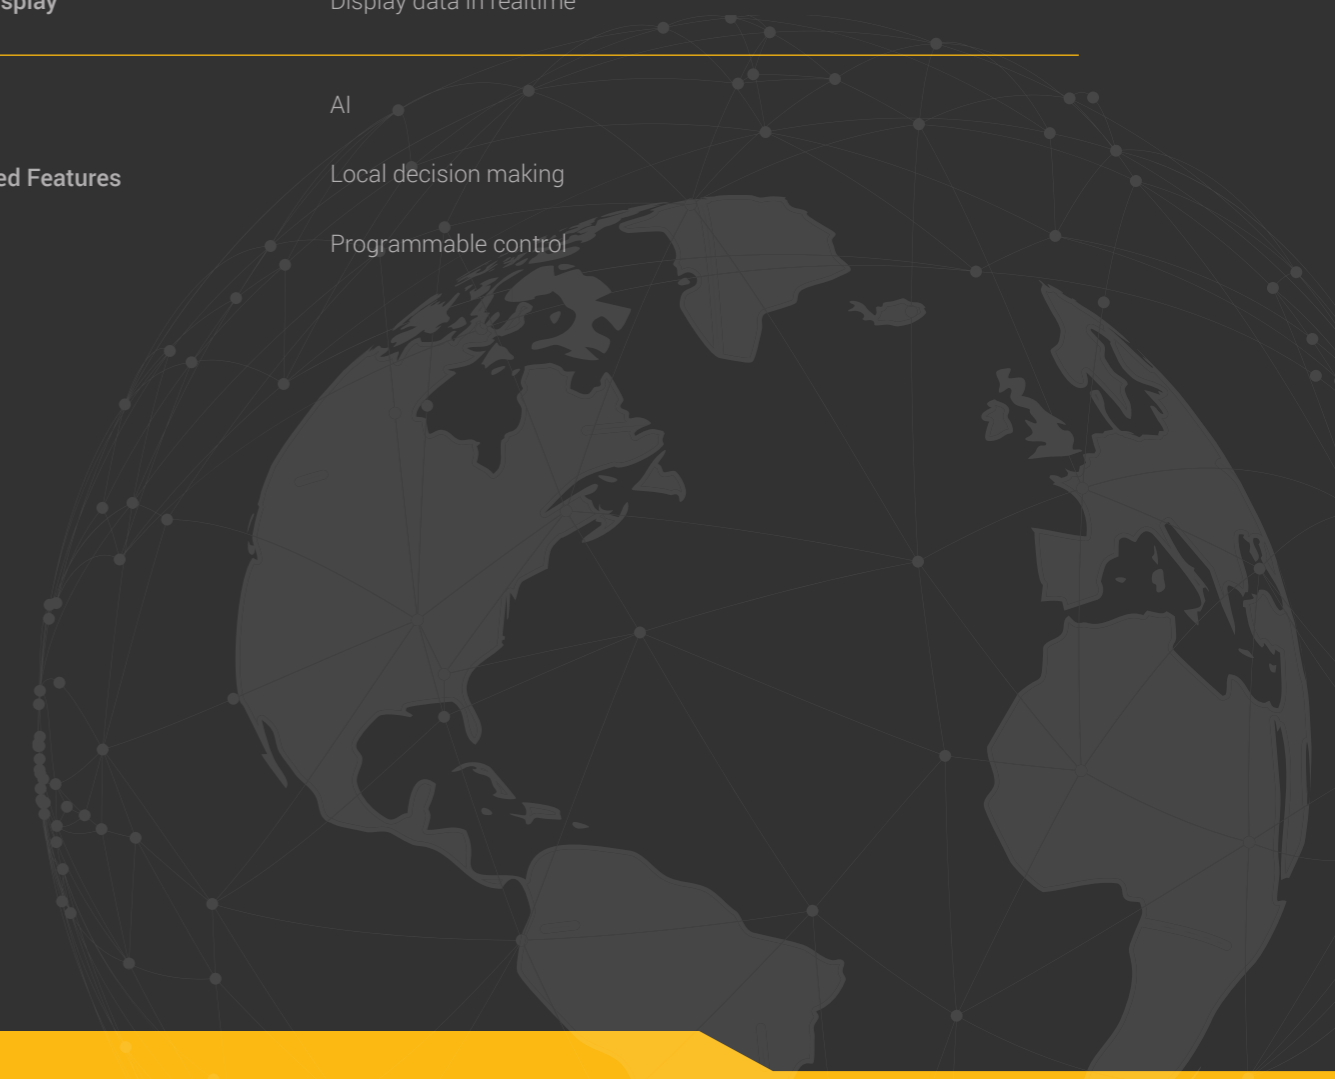

# SOFTWARE

## SOFTWARE

*"What we like the most is the ease of use of the Software, that it can be used from experienced energy managers all the way to administrative staff and extract insight from the data easily. The software is constantly evolving to enhance its functionalities based on feedback from clients, which allows us to constantly push our offering even further as updates roll out. Having worked with many different EMS softwares ranging from BMS systems to all cloud services, we find BEST Analytics to be the most user friendly and price / Value. The API makes the Database easy to manage into different client systems."*

Roberto Flores, EnergyCloud - Official Consultants to IBM SEMS

Unlike many competitive products, Enscope offers both hardware and software in a single solution. With one intuitive, cloud-based platform, energy managers can access real-time data from dozens of sites in a single location. That data can be displayed in a variety of chart types and analysed at granularity levels as fine as 1-minute intervals, including on our proprietary Android and iOS smartphone apps.

Time periods can be compared, data exported, alarms set and a range of end products created - including automated reports and tenant billing. And with full integration into a custom version of Microsoft Power BI, Enscope offers customisable visual dashboards and reports.

Behaviour change is key to effective energy management, and with our customised public displays this is made easier than ever. League tables, real-world comparison figures (eg. energy saved = trees planted) and daily statistics help motivate and engage stakeholders, turning them from part of the problem into a key component of the solution.






## ANALYTICS

*"The analytics are very powerful. The software can be used for asset, energy, and service management initiatives and the delivery of significant cost savings."*

Paul Poirier, Director - ABATE, energy management providers to Telefonica, Colombia.

With a huge range of selectable fields and data available at minute by minute granularity, refreshed every 60 seconds, Eniscope offers unrivalled data accuracy and energy visibility.

And with a combination of Power BI custom dashboards built specifically for particular installations and our standard, easy-to-use graphical systems - it's easy to manipulate and assess data streams, even from hundreds of sites.

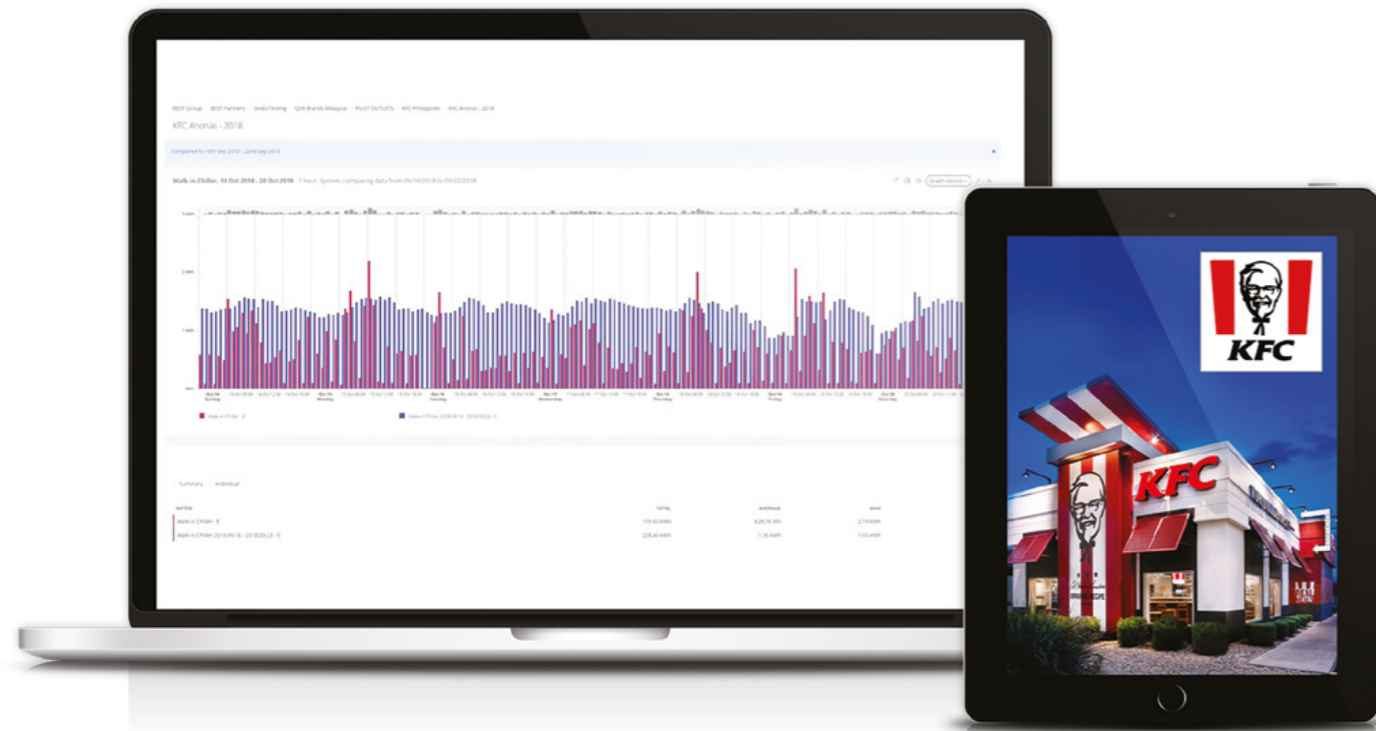

Screenshot showing data comparison before and after an energy saving intervention

<b>Selectable field and parameters</b>	Energy Export Energy Reactive Export Energy Reactive Energy Apparent Energy Carbon Cost BTU Power Reactive Power Apparent Power Current Amp Hour Voltage Line to Line Voltage Power Factor Flow Temperature Return Temperature Volume Flow Volume Temperature 1/2 Phase Angle 1/3 Phase Angle	Designed so that energy managers can analyse energy waste as thoroughly as possible and identify savings opportunity
<b>Selectable resolution</b>	Auto 1 minute 15 minutes 30 minutes 1 hour 1 day	From 1 min to 1 day, allowing the user to avoid congested data and quickly identify trends - as well as providing the option for intricate, high-resolution data when deeper analysis is required.
<b>Graphing Format</b>	Line, Bar, Pie Charts	Multiple output options for analysis and reporting.
<b>Graph Zooming</b>	Click, drag and scroll	Intuitive functionality.
<b>Summary Table of key data</b>	Total, Avg, Max, Min	Allowing the user to quickly focus in on key site-specific information.
<b>Single / 3 Phase Option</b>	Select between system average and 3-phase	-
<b>Data Comparison</b>	Compare data to other time periods	Compare data to multiple user defined periods.
<b>Language Selectable</b>	English, Spanish, Russian, Brazilian Portuguese, Greek, Arabic	Supports non-English language options.
<b>Data Download options</b>	CSV, SVG, JPEG	Allowing even deeper analysis off-platform.
<b>Meter status</b>	Last upload time, Name & Mac Address	Check to see if meters are uploading data.
<b>Share via URL</b>	Yes	Charts can be shared by unique URL.
<b>Customisable Themes</b>	Currently Light / Dark	Enhancing the user experience

<b>Time Zone</b>	Supports local timezone	–
<b>Graphing Refresh</b>	Chart Auto Refreshes every 60 seconds	
<b>Show / Hide spikes</b>	Yes	
<b>Show / Hide Gaps</b>	Yes	
<b>Data shown in hierarchial format</b>	Yes	Multiple features for ease of identifying energy abusing equipment.
<b>Supports Trendlines</b>	Yes	
<b>Events</b>	Create Events and markers on the graphing charts	
<b>Data Scaling</b>	Dynamic Scaling of Data option	
<b>Data Source</b>	Multi Source Data, Gas, Water, temperature, Pulse, Eniscope Air, Monnit	

## REAL TIME DISPLAYS

Provides instant, second-by-second feedback, enabling faster identification of energy-wasting issues. This real-time verification of the decisions stakeholders make in the building, in conjunction with our public display functionality (explored below), is what drives behaviour change - crucial to a sustainable energy saving strategy.

A very public, branded display of progress also enhances a company's CSR record and helps engage their own stakeholders.

<b>Access</b>	Access via any Web browser, Safari, IE, Firefox, edge, Opera
<b>Location</b>	Local Area Network
<b>Real time Parameters</b>	V, I, kW, kVAR, kVA, PF, Hz, CO2, \$/£/€, Pulse, Temp
<b>Displays</b>	Real-Time & Renewable
<b>Viewing Format</b>	HTML5
<b>Real Time Trending Graph</b>	P, I, kVA
<b>Real Time Dial</b>	kW, V, PF
<b>Language</b>	English, Spanish, Danish, Greek, Russian
<b>Display Title</b>	Editable
<b>Time Zone</b>	User definable
<b>Alarm Notification</b>	Instant alarm Max / Min alerts
<b>Alarm Parameters</b>	P, V, I, PF
<b>Alarm</b>	All 3 Phase or Single Phase
<b>Alarm Recovery</b>	Alarm Recovery Alert - time definable
<b>Custom Messaging</b>	User Editable Custom Messaging & Title
<b>Messaging</b>	Message frequency definable 1, 5, 10min
<b>Branding</b>	Logo upload facility
<b>Real Time Renewable Display Messaging</b>	Messaging with custom energy field inputs

## CUSTOMISABLE PUBLIC DISPLAYS

The Eniscope Public Display module allows you to build a custom slideshow that pulls live data from any device connected to the platform. This tool is designed to engage non-technical users and inspire positive behaviour change. It's also ideal for showcasing green credentials.

<b>Access</b>	Access via any Web browser, Safari, IE, Firefox, edge, Opera	–
<b>Location</b>	Cloud Based	–
<b>Design</b>	Choice of Templates	Choose from various predesigned colour schemes and themes to suit your audience.
<b>Page Transitions</b>	Customisable1	11 Options, from 10 seconds to 3 minutes.
<b>Slide Builder</b>	Drag and Drop	Easy to quickly configure new bespoke displays.
<b>Modules</b>	9 Interactive Module Options: Leaderboard Position Target against performance Comparison against time Custom Message Conversion Energy In an Easy to Understand Format Organisation Comparison Renewable V's Consumption Energy BAr Charts Energy Pie Charts Totals	Build displays according to corporate strategy requirements i.e league tables, green power, carbon footprint, targets etc.



## AUTOMATED REPORTING

**Eniscope offers a system of automated report delivery.**

It's easy to build bespoke reports using 11 different drag and drop modules that pull live data from any device connected to the platform. Reports can be scheduled for delivery via email, with a customisable message to any number of recipients at any time of day and at a selectable frequency.

<b>Customisable Delivery</b>	Yes	Adjust frequency of report delivery, i.e. weekly, monthly, daily
<b>Access</b>	Access via any Web browser, Safari, IE, Firefox, edge, Opera; Individual or company log-in	Accessible to all relevant employees, no matter what browser they prefer.
<b>Location</b>	Cloud Based	–
<b>Language Options</b>	English, Spanish	–
<b>Schedule Frequency</b>	Daily, Weekly, Monthly (Choose day and time)	Fully customisable, as per each site's individual preferences.
<b>Report Modules</b>	Cover page, text, charts (bar, pie and line), comparisons (target, meter, organisation), equivalence (comparison, target), usage (breakdown, totals, header-forecast), exceptions, events, renewable, leaderboard, images.	Modular system allows for quick, intuitive report building. Easily customise reports based on different department and project requirements - for example finance reporting, senior leadership presentations, board meetings etc.
<b>View</b>	Preview, schedule, history	Ensure the finished report is fit for purpose before issuing with our preview function. Automatically update reports with the latest data with our schedule function, and use report history to find a similar report created previously

### Display Resolution

Auto, 1 minute, 15 minutes, 30 minutes, 1 hour, 1 day

–

### Chart Measurements

Energy  
Export Energy  
Reactive Export Energy  
Reactive Energy  
Apparent Energy  
Carbon  
Cost  
BTU  
Power  
Reactive Power  
Apparent Power  
Current  
Amp Hour  
Voltage  
Line to Line Voltage  
Power Factor  
Flow Temperature  
Return Temperature  
Volume Flow  
Volume  
Temperature  
1/2 Phase Angle  
1/3 Phase Angle

Designed so that energy managers can thoroughly analyse energy waste and identify savings opportunities.

## TENANT BILLING

The Tenant Billing system gives you the ability to generate invoices derived from Eniscope data readings. It is built from the ground up to be multi-tenanted, so that you can manage a large site and generate bills for each tenant and email them directly to them.



<b>Location</b>	Cloud-Based	Ability to access the system from anywhere in the world.
<b>Tariffs</b>	Multiple user-defined tariffs	Ability to set separate tariffs for each tenant.
<b>Invoice/Bill Delivery</b>	Onscreen, PDF, HTML, CSV batch download, Upload to remote billing system	Multi-invoice delivery options and integration with third-party billing systems.
<b>Tenant Management</b>	Ability to move tenants in and out of the outlets, generating a bill of charges to date	Enforcing proper processes when the tenant moves out.
<b>User Interface</b>	Responsive layout to fit tablets and mobile devices. User permissions enabling you to control what each individual user sees in the system.	Access the billing system on any device size.
<b>Metadata</b>	User-defined fields, such as floor area, contracted power supplied	Ability to define custom fields for tenants, tenancies and outlets.
<b>Localisation</b>	Language translations and currency formats	Can be used in multiple countries and markets.
<b>Integration</b>	Integration directly with the Eniscope Core system	Links to Analytics for analysis of the energy data.
<b>Batch Billing</b>	Bills are generated in batches for the time-period you specify.	Allowing you to view all bills generated this month before they are sent to the customer.
<b>Invoice Templates</b>	Ability to have multiple templates	Templates customised for each account/organisation.
<b>Data Transferability</b>	CSV downloads	Download data for analysis in Excel or Power BI etc.

## CLOUD BASED SETUP - ADMIN

The Eniscope Cloud Administration area has been designed to facilitate the easy management of devices and data streams across multiple sites. This area allows various levels of access and permissions for different user profiles (e.g. clients, staff and operators).

One key differentiator is the ability to abstract data streams from their hardware capture points and create bespoke data views for advanced analysis (e.g. benchmarking the performance of similar assets, like air-conditioning in classrooms, across an entire estate).

<b>Access</b>	Access via any Web browser, Safari, IE, Firefox, edge, Opera
<b>Location</b>	Cloud Based
<b>Structure</b>	User defined Hierarchical view/setup
<b>Structure level</b>	Unlimited
<b>Structure View</b>	Location, building, Floor Level,department... etc
<b>Eniscope Setup</b>	Equipment Activation & Setup
<b>Energy Tariff</b>	Cloud Based & Editable
<b>Alarms</b>	Cloud Based & Editable

## MOBILE APP

Enabling on-the-go analysis, our mobile app is available for both Android and iOS smartphones. A real-time dial system gives a clear, graphical representation of energy consumption and kWh comparison charts allow you to benchmark this data immediately.

And with automated alarm alerts, our app helps energy managers immediately address energy abusing equipment.

Energy management in your pocket!

<b>Operating Systems</b>	Android & iOS	On-the-go analysis on your smartphone.
<b>LAN</b>	Instant Energy Data	–
<b>Energy Data</b>	kW, CO2, Cost	Multiple data types for quick, but thorough analysis.
<b>Location Selectable</b>	Multi-location user selectable	Compare locations within the portfolio at a glance.
<b>Channel Access</b>	Channels Are User Selectable	Toggle between metering points to quickly compare and contrast.
<b>Graphical Interface</b>	Real time dial	Intuitive data display, with clear green / red colour scheme.



## CUSTOMISED POWER BI DASHBOARDS

The Eniscope system has been fully integrated into a custom version of Microsoft Power BI.

This automatic link between Power BI and Eniscope Cloud platform enables automatic data updates and refreshes, allowing for fully customisable visual dashboards and reports that show a huge range of data types - all automatically updated with the latest available information.



## API

The Eniscope Core API is a powerful tool to allow you to integrate your Eniscope data into your own systems. Through a RESTful API structure, you can extract data for any Eniscope channel in the data range and resolution you require.

<b>Security</b>	Authenticated using your username and password, along with an API supplied by us. Accessed over HTTPS	To ensure that no one can access your data except you.
<b>Energy Parameters</b>	All energy parameters accessible via the API	To ensure you can get any of the values which your Eniscope or device sends us.
<b>Integration with your custom business systems</b>	You can display Eniscope data in the same user interface such as a CRM or business system	Increased staff experience.
<b>Build new functionality</b>	Build functionality around your energy data, which isn't included our Core offerings.	Helping you to future-proof in your Energy Management solution.
<b>Build reporting tools</b>	Build custom reporting tools for your customers using the data stored in the Eniscope platform	Enhanced customer experience.
<b>Data Export</b>	Using our API, you can export a subset (or all) of your data	For analysis using Excel or Power BI etc.
<b>Data Format</b>	JSON	Easy-to-read responses from the API.

## DATA EXPORT

The Data Export Tool helps you to export your data from the Eniscope platform. It enables you to use your data for integration with third-party systems and is also a useful tool for backing up your data.

<b>Location</b>	Cloud based	-
<b>Energy Parameters</b>	Ability to select which of your parameters you wish to export	-
<b>Delivery</b>	FTP upload, Email or Download	A variety of delivery methods to ensure that your data gets to the correct place.
<b>Automation</b>	Setup automated exports to happen daily	-
<b>Data Format</b>	CSV	Industry standard format for data exports.

## IBM WATSON CERTIFIED

The Eniscope has achieved "IOT Ready for Watson" status with IBM.

This means that Eniscope has been approved as being fully compatible with IBM and its "Watson" range of products and services.



Ready for  
IBM Watson IoT

# ANCILLARIES

## ANCILLARIES

A range of supporting products, which help Eniscope seamlessly integrate into the incumbent electrical systems at any given site scenario. Our ancillary products ensure speedy, safe installation and that efficient methods of adaptation are available for unusual site requirements.

<b>Current Transducers (CT)</b>	333mV range from 5A - 6000A	No danger of electric shock to installers.
<b>Current Transducer (CT) Connection cable</b>	RJ12 Extension cable 1m 600V/Zero Halogen	Speedy installation.
<b>CT Extenders</b>	RJ12 Extension cable 2 / 6m 600V/Zero Halogen	Efficiently adapt to on-site requirements.
<b>1-Wire Temperature Probes</b>	3m cable, -55C/+125C temp range, extendable up to 100m, Bus system allows up to 8 temp probes per connection	Ultra-reliable, wide-range, hard-wired temp sensors for robust, accurate, real-time temperature readings
<b>IoT Sensor Integration</b>	Eniscope Air product line	See below.



# OTHER HARDWARE

## OTHER HARDWARE


### BACnet Converter

The BACnet converter is a device that allows the Eniscope platform to fully integrate with a BACnet compatible BMS system.

The converter allows the Eniscope hardware to upload any recorded data into the BACnet BMS system in real-time, making the recorded data available and usable for decision making within the BMS system itself.

It also allows the BACnet BMS system to upload data directly into the Eniscope cloud platform, allowing meters and sensors that aren't directly connected to the Eniscope hardware available within the cloud platform.

Size (W x L x D) mm	110 x 83 x 28mm
Communication Protocols	MQTT, HTTP, BACnet
Input Power V	10v DC
Cloud Configurable	Yes
On Board Storage	8 GB SD Card
Expandable Storage	Yes
Remote Firmware Upgrades	Yes
Warranty	2-Years

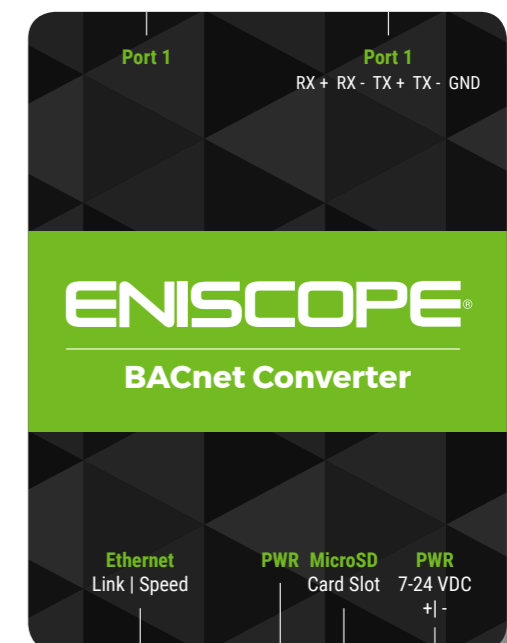



## ENISCOPE - WIRELESS SENSORS

Future Solutions can provide wireless ambient temperature sensors, wireless pulse counters and wireless controllers.

Wireless temperature sensors use a thermistor to accurately measure temperatures. These sensors are perfect for monitoring ambient temperatures around the sensor's physical location. User customization allows you to set the frequency of readings, and to set thresholds for alerts via SMS text and/or email.

Wireless pulse counters can be integrated with a dry contact or mechanical switch to count the number of actuations occurring within a given time frame. The counter includes 3 software configurable low pass filter settings (No filter, 40 Hz filter, or 4 Hz filter).

The wireless control units contain two separate relay switches allowing for individual control through the online sensors' portal. The control unit relays can be switched on/off manually through the software or automatically by any wireless sensor notification assigned to a single sensor or group of sensors when a specified condition is detected. Comes in 10 Amp and 30 Amp models.

### Wireless Temperature Sensor Features

<b>Wireless Range</b>	1,000+ feet through 12-14 walls
<b>Supply Voltage</b>	2.0 - 3.8 VDC
<b>Current Consumption</b>	0.2 $\mu$ A (Sleep Mode) 0.7 $\mu$ A (RTC Sleep) 570 $\mu$ A (MCU Idle) 2.5 mA (MCU Active) 5.5 mA (Radio RX Mode) 22.6 mA (Radio TX Mode)
<b>Operating Temperature Range (Board Circuitry and Batteries)</b>	-18°C to 55°C (0°F to 130°F) using alkaline -40°C to 85°C (-40°F to 185°F) using lithium
<b>Thermistor Temperature Range (Thermistor Only)</b>	-40°C to +125°C (-40°F to +257°F) (Limited to Main Unit Circuitry, -7°C to +60°C unless thermistor leads are being used)
<b>Accuracy @ 25°C</b>	+/- 1% (1° C or 1.8° F)
<b>Weight</b>	3.7 Ounces
<b>Additional Sensors</b>	-



### Wireless Pulse Counter Features

<b>Wireless Range</b>	1,000+ feet through 12-14 walls
<b>Supply Voltage</b>	2.0 - 3.8 VDC
<b>Current Consumption</b>	0.2 $\mu$ A (Sleep Mode) 0.7 $\mu$ A (RTC Sleep) 570 $\mu$ A (MCU Idle) 2.5 mA (MCU Active) 5.5 mA (Radio RX Mode) 22.6 mA (Radio TX Mode)
<b>Operating Temperature Range (Board Circuitry and Batteries)</b>	-18°C to 55°C (0°F to 130°F) using alkaline -40°C to 85°C (-40°F to 185°F) using lithium
<b>Maximum count</b>	4294967296 (32 bit number)
<b>Input Voltage</b>	0 to 15 Volts DC
<b>Counter Operation</b>	Positive and / or Negative Edge Pulses
<b>Compatibility</b>	Open Collector NPN Switches (Passive) Mechanical Switches (Passive) 0-15V Driven Source (Active)
<b>Weight</b>	0.7 Ounces



## Wireless Control Device Features


Wireless Range	1,000+ feet through 12-14 walls
Input Power	5.5 VDC @ 900 mA
Indicator Lights	Four LED indicators - Power - Radio (RF) communication - Relay 1 status (On/Off) - Relay 2 status (On/Off)
Enclosure	ABS Plastic UL94V-0 flame rating
Dimensions	5.5 x 3.355 x 1.25 in. (139.7 x 85.217 x 31.75 mm)
Weight	8 ounces
Operating Temperature	-40° to +85° C (-40° to +185° F)
Number of Relays	2 (individually controlled)
Max Switching Voltage	10A version: 250 VAC, 100 VDC (0.5A) 30A version: 277 VAC
Max Switching Current	10A version: 10A (AC), 5A (DC) 30A version: 30A



*"In a heartbeat we would recommend it.  
It's cutting edge, it really is."*

Gretchen Saunders, Chief Business Officer,  
Hillsborough County Schools District

## Our Range Of Sensors Include:

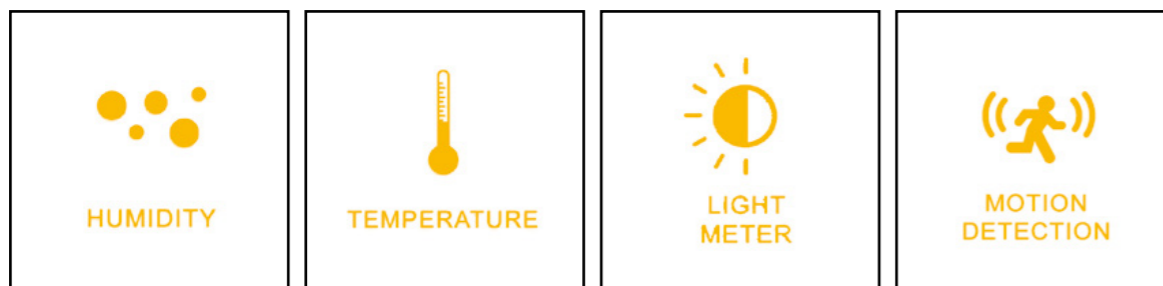

# ***FUTURE SOLUTIONS***

[info@futuresolutions.energy](mailto:info@futuresolutions.energy)

905 536 1908

[futuresolutions.energy](http://futuresolutions.energy)

Future Solutions,  
335 Star Lake Road,  
Seguin,  
ON, Canada,  
P2A 0B6